

# A/C LEAK SEALER - Cool Seal is a blend of lubricants and additives

Cool Seal™ repairs slow, annoying leaks in compressors, condensers, evaporators, o-rings and hoses – quickly and permanently.

Cool Seal™ is a non-polymer, oil-soluble formula, which is safe for air conditioning, refrigeration systems and recovery equipment.

Cool Seal™ is also ideal for preventative maintenance.

- Works in all popular AC&R systems, including high-pressure R-410A systems
- Seals leaks as large as 0.5mm (0.020 inch)
- An alternative to expensive parts replacement on older AC&R systems
- Remains safely in system to help protect against any future leaks
- Meets ASHRAE 97 standard for chemical stability
- Available in two convenient delivery methods (BigEZ™ and EZ-JECT™)

## DOSAGE CHART - OIL (ml)

EZ-Ject	Graduation	BigEZ
50ml	1	150ml
100ml	2	300ml
200ml	4	600ml
300ml	6	900ml
400ml	8	1200ml
500ml	10	1500ml
600ml	12	1800ml
	14	2100ml
	16	2400ml

## DOSAGE CHART - REFRIGERANT (g)

EZ-Ject	Graduation	BigEZ
200g	1	600g
400g	2	1200g
800g	4	2400g
1200g	6	3600g
1600g	8	4800g
2000g	10	6000g
2400g	12	7200g
	14	8400g
	16	9600g



### CS-100CS S020258 EZ-Ject Kit

Includes EZ-Ject™ injector assembly hose/coupler with check valve and purge fitting and two (2) EZ-Ject™ cartridges prefilled with Cool Seal™ A/C leak sealer. Each cartridge treats a 7 kW system.




### CS-2CS S020260 BigEZ Cartridge

A large, prefilled cartridge that works with the BigEZ™ injector. Can also be used with EZ-Ject™ injector using the adaptor (CS-50) and hose/coupler (CS-35). Each cartridge has 60ml of sealer, and in normal circumstances, 15ml of sealer will treat a 7 kW system.




### CS-1CS S020259 EZ-Ject Cartridge

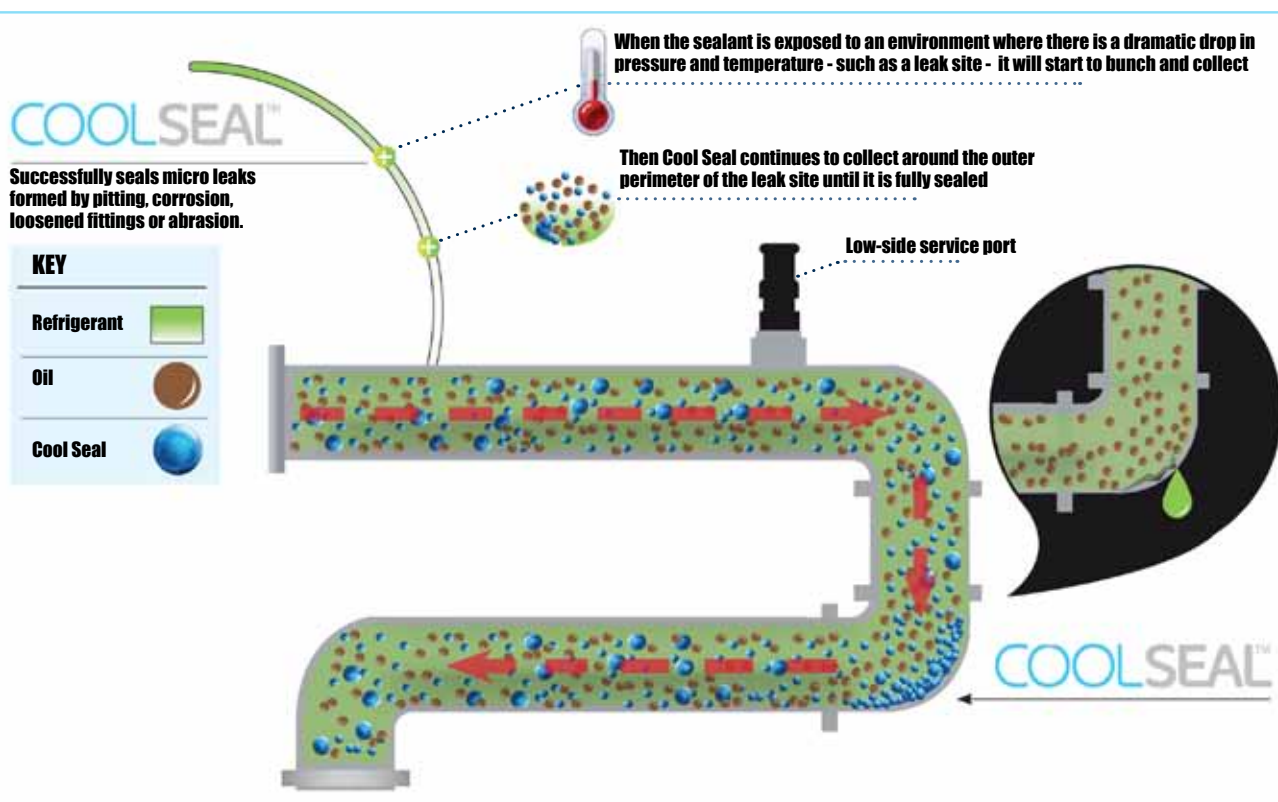

# COOLSEAL™

## HOW IT WORKS

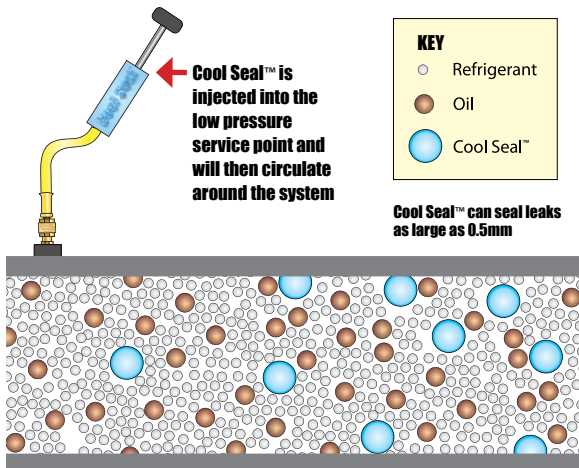


Cool Seal™ is injected into the low pressure service point and will then circulate around the system


**KEY**  
○ Refrigerant  
● Oil  
● Cool Seal™

Cool Seal™ can seal leaks as large as 0.5mm

Cool Seal™ does not react with air or moisture to seal leaks. It works by consisting of larger molecules - which are still microscopic - that will not block up the system.

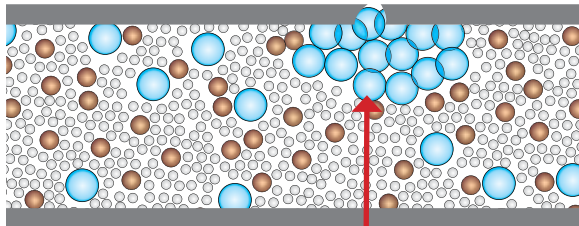

When a leak occurs, the molecules bunch up at the leak site, which stops oils and refrigerant from escaping. This permanently seals the hole or leak on working systems.

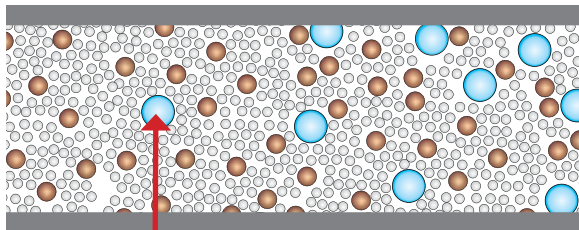

Any remaining Cool Seal™ will remain safely in the system, circulating around, on guard for any future leaks.

## PRODUCTS

**CS-100CS**  
Cool Seal™  
EZ-JECT™ Kit

**119690**  
Purge fitting

**CS-1CS**  
Cool Seal™ EZ-Ject™  
cartridge

**CS-25**  
EZ-Ject™ hose/  
coupler with check  
valve and purge  
fitting

**EZ-50**  
EZ-Ject™ injector  
assembly

**CS-2CS**  
Cool Seal™ BigEZ™  
Cartridge

**BEZ-50**  
BigEZ™ injector  
assembly

**CS-35**  
BigEZ™ hose/coupler  
with check valve and  
purge fitting

**CS-50**  
EZ-Ject™ adaptor  
fitting



**Advanced Engineering Ltd**  
Guardian House, Stroudley Road  
Basingstoke, Hampshire, RG24 8NL. UK  
T: +44 (0)1256 460300  
E: sales@advancedengineering.co.uk  
www.advancedengineering.co.uk

SPECTROLINE®

# COOLSEAL™

## Air conditioning and refrigeration Leak Sealer

